





THANKS FOR YOUR PURCHASING.
WE HOPE YOU ENJOY IT.

INSIDE:


1. Base



2. Hook



3. Rear wheel plate

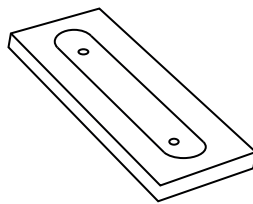


TOOLS NEEDED TO INSTAL:


- Screw Gun / Drill
- Auger 12 mm diametr
 - Wrench
 - Level
- Pencil/marker

INSTRUCTIONS

4. Two small screws

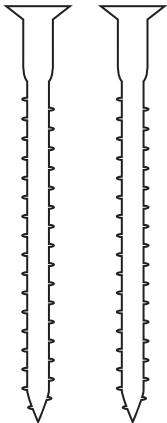

5. Big screws and dowels

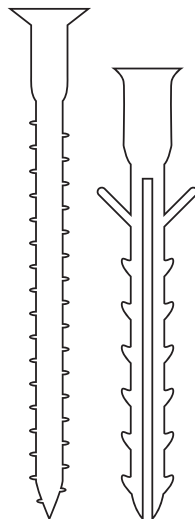

1. Find a best place for the rack, use level and mark points for holes on the wall.
2. Drill holes and put dowels inside.
3. Attach the shelf to the wall and tighten the screws
5. Enjoy your new stuff

NOTE

You can mount rack on drywall also if you know how it to do. You can buy special anchors for mounting at a local hardware store. But we are not responsible for the result, because the wall materials can be different and mounting requires special care.

IMPORTAND

Twonee disclaims all liability for damage or injury resulting from the improper installation or use of items to the fullest extent permitted by law. Weight limit for hanging bike is 13 kg (44lbs). Do not ever sit on, stand on, or hang from shelf.

FEEL FREE TO ASK ANY QUESTION INFO@TWONEE.COM